

1



2

3




4

DWG. NO.

REV	ZONE	DESCRIPTIONS	DRAWN	APPRVD	DATE

INPUT SHAFTOUTPUT SHAFT

4-M8 TAP DP:15
(관통금지)
(90°등간격)

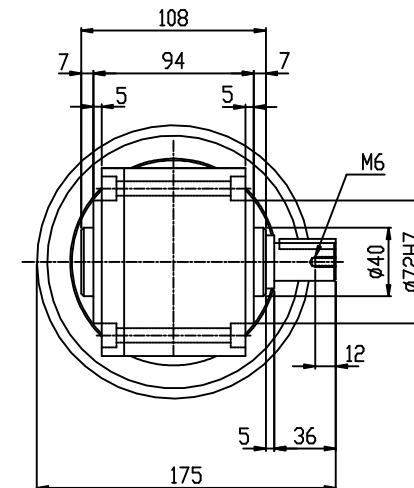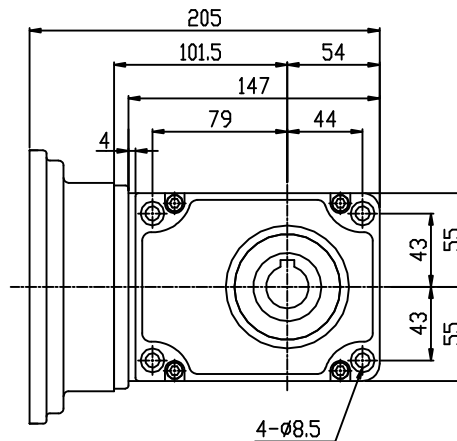

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

표기외 일반 공차	
각도 : ±0.2°	6 - 30 : ±0.1
CHAMFER: C1.0	30 - 120 : ±0.15
FILLET: R1.0	120 - 315 : ±0.2
마무리: ▽▽	315 - 1000 : ±0.3
	1000 이상 : ±0.5

본 도면은 (주)삼양감속기의 기술 재산입니다. 본 도면은 지적 재산권 관련 법규에 의하여 보호되며, (주)삼양감속기로부터 문서 또는 전자적으로 무단으로 복제, 배포, 대여, 전람, 또는 기타 방법으로 제3자에게 공개하는 행위는 법적으로 처벌을 받습니다.

NAME	DATE	SCALE	TITLE	SHEET
		1/1	HYPO-MAX 증실축 0.2 kW 1/15 ~ 1/60	1/1
CHECKED				
APPROVED				
SAMYANG REDUCTION GEARS CO., LTD		DWG. SIZE A4	DWG. NO. HM25 외형도(IEC)	REV

1

2

3

4

