

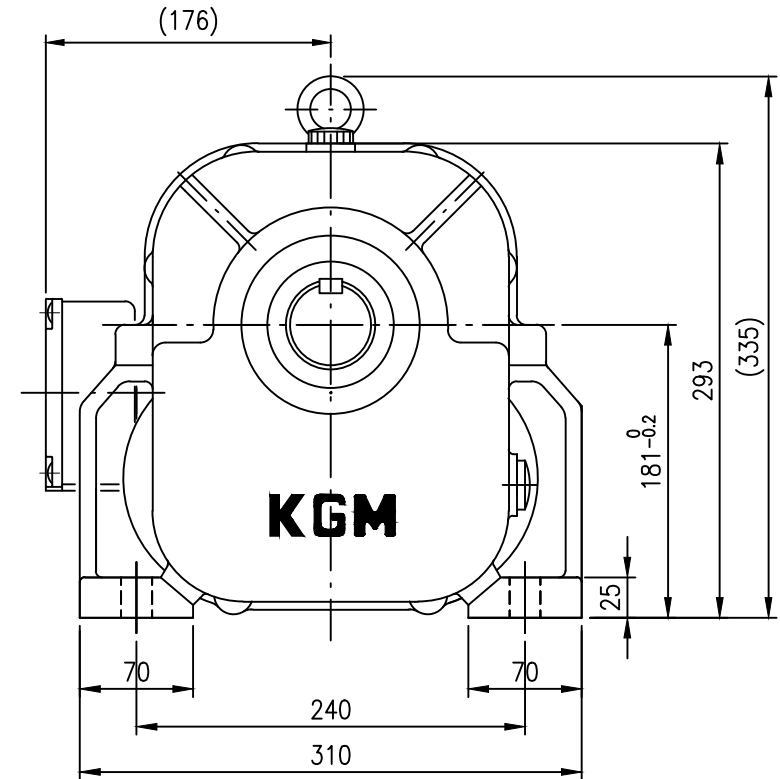


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KF181-K-3HP 4P

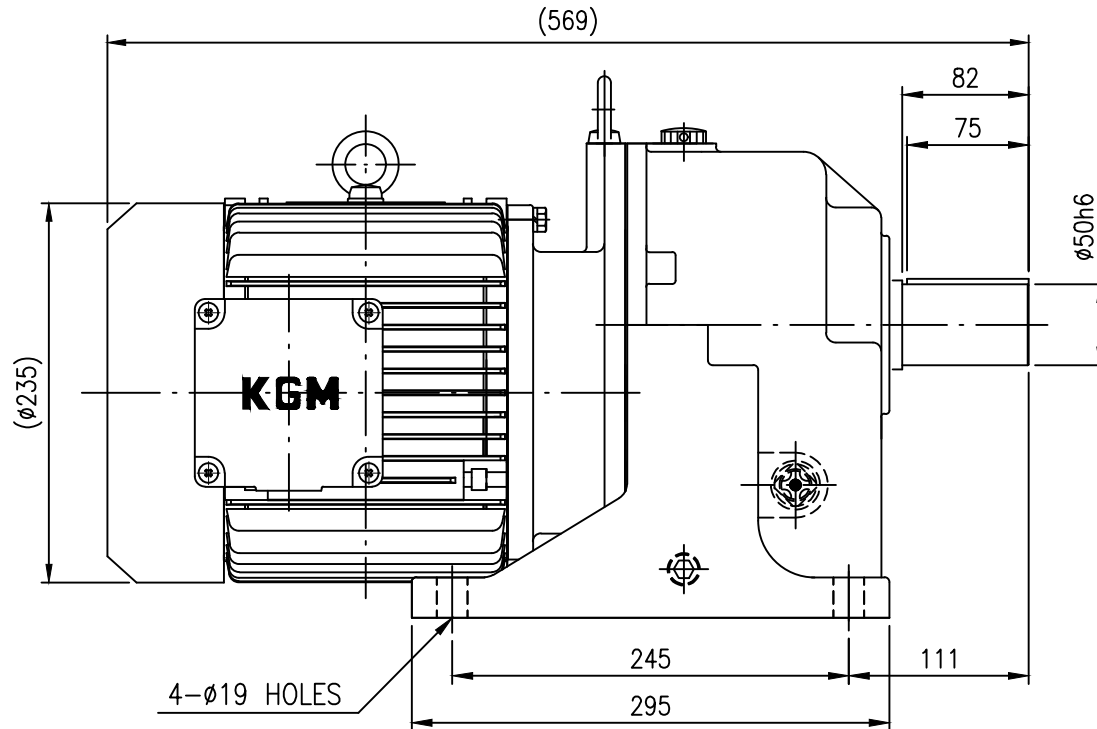

OUTPUT SHAFT

(주)MAX.TORQUE; 67.8Kg-m이하로 사용

KF181	CAPACITY (Kw)	2.2Kw 4P				WEIGHT (Kg)
	REDUCTION RATIO	1/40	1/50	1/60	1/75	
	OUTPUT R.P.M	45	36	30	24	

TOOTH CHAMFERING		MODULE						표기외 일반 공차			표기외 일반 공차	
		0.5	5-15	15				각도 : ±0.2°				6-30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0				30-120 : ±0.15
	C2	1.0	1.5	2.0				FILLET: R1.0				120-315 : ±0.2
HC & HQ. I	C1	0.5	1.0	2.0				마무리: ∇				315-1000 : ±0.3
	C2	2.0	3.0	5.0				1000 이상 : ±0.5				

OUT LINE DWG					
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T
TITLE SPEC.		KF181 GEARED MOTOR KGM MOTOR 3HP 4P 1=1/40~1/75		CUSTOMER STANDARD TYPE	
DRAWN		KSS	SCALE	1 / 1	UNIT mm
DESIGN		YHH	DATE	2019.09.07	PROJECTION
CHECKED			REF. No.		REV. No.
APPROVED			DRAWING No.	KGM-KF181-HT-03-00-00	△
(주) 케이 지 엠 KOREA GEARED MOTOR					

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3