

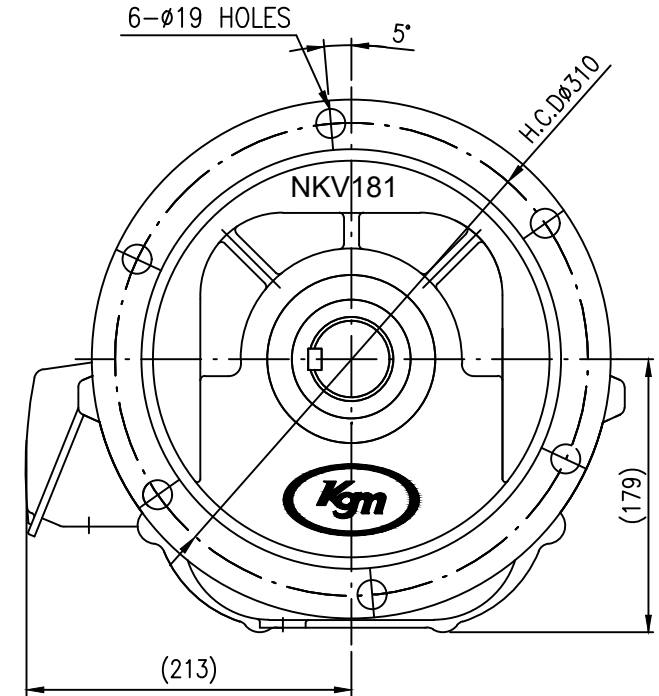


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

KV181-7.5HP 4P

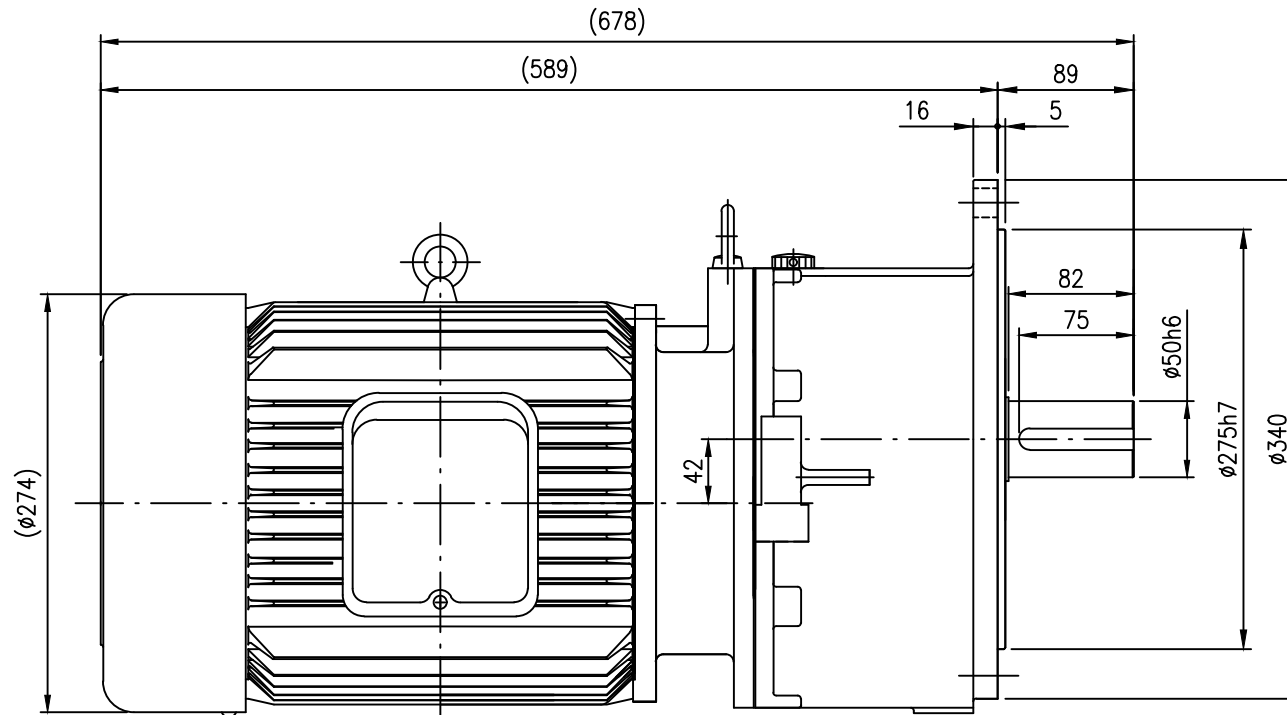

KV181	CAPACITY (Kw)	5.5Kw 4P				WEIGHT (Kg)
	REDUCTION RATIO	1/5	1/10	1/15	1/20	
	OUTPUT R.P.M	360	180	120	90	

TOOTH CHAMFERING	MODULE	5	5-15	15	표기외 일반 공차	본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산과 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 문서에 의한 승인 없이 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 타인에게 누설할 수 없습니다.
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2°	6 - 30 : ±0.1
	C2	1.0	1.5	2.0	CHAMFER: C1.0	30 - 120 : ±0.15
					FILLET: R1.0	120 - 315 : ±0.2
HC & HQ. I	C1	0.5	1.0	2.0	마무리: ▽	315 - 1000 : ±0.3
	C2	2.0	3.0	5.0		1000 이상 : ±0.5

	OUT LINE DWG						
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	GEARED MOTOR		CUSTOMER STANDARD TYPE				
	KV181 7.5HP 4P IE3 I=1/5~1/20						
	OUT LINE DWG						
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YHH	DATE	2019.09.06	PROJECTION			
CHECKED		REF. No.			REV. No.		
APPROVED		DRAWING No.	KGM-KV181-VT-7.5-00-00				
		(주) 케이지엠					
KOREA GEARED MOTOR							

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

Kgm (주) 케이 지 엠
KOREA GEARED MOTOR