



NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

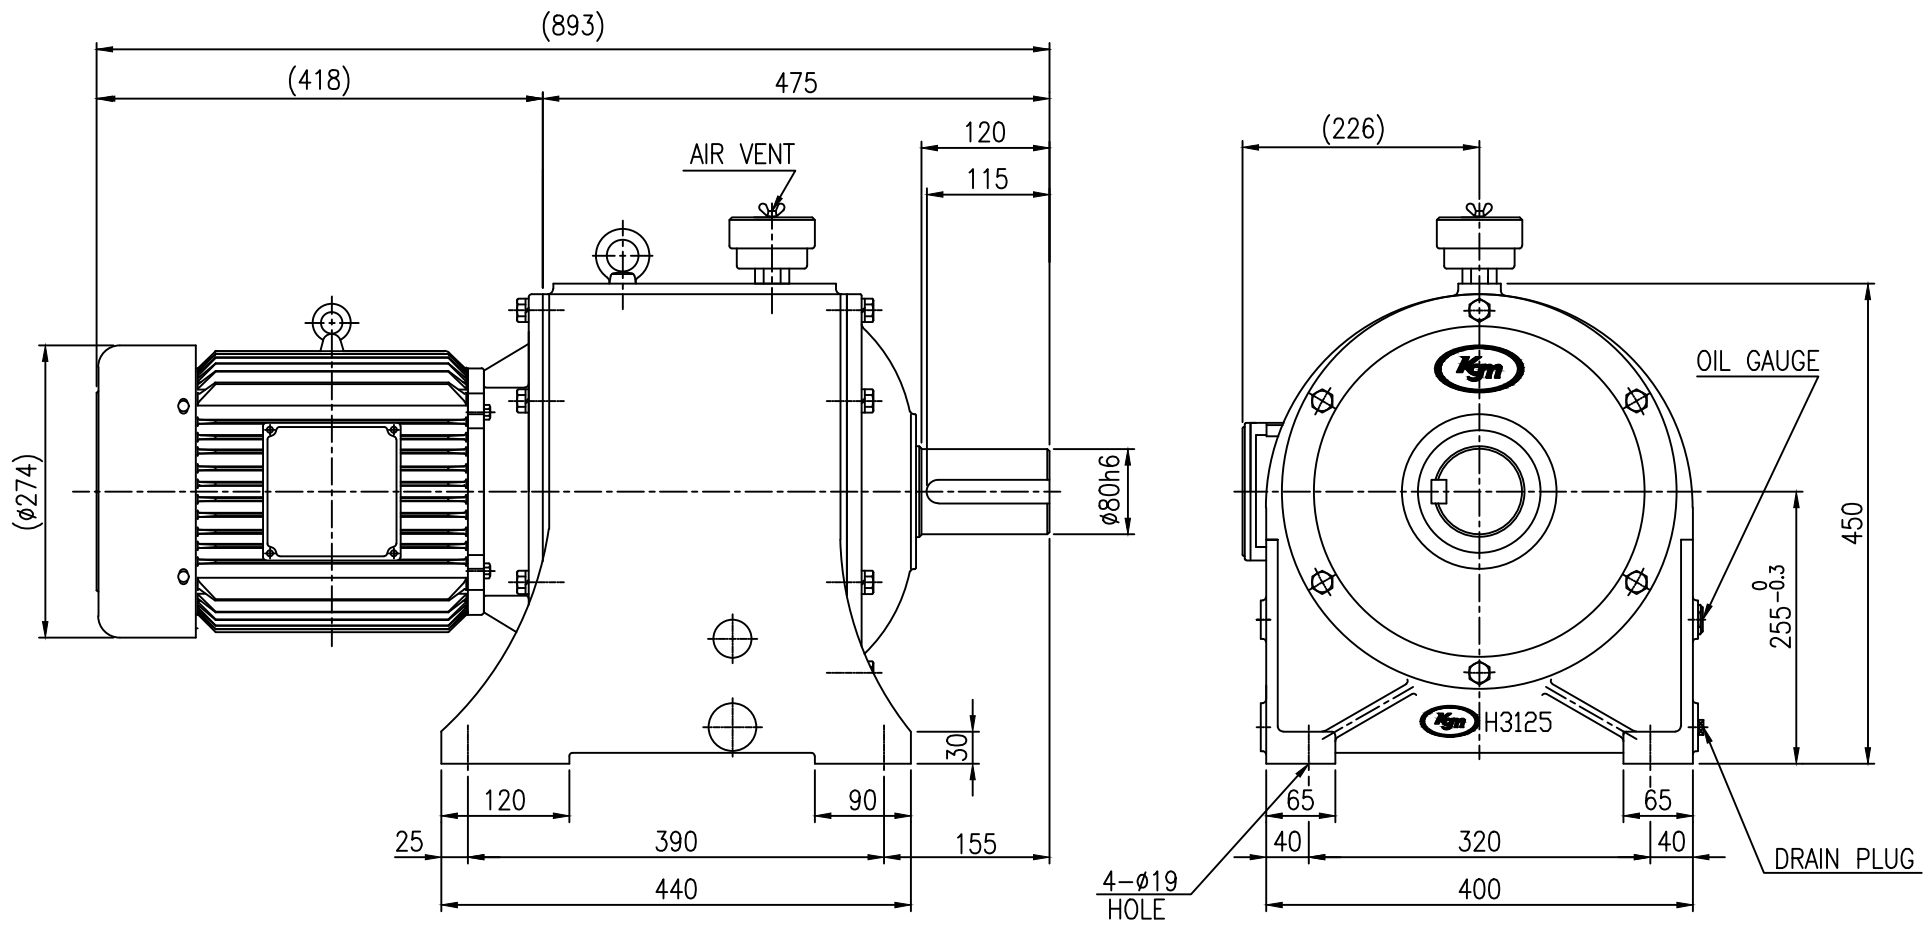

KD H2553	CAPACITY(Kw)	7.5kw4P			5.5kw6P		
	REDUCTION RATIO	1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M	45	36	30	30	24	20
	WEIGHT (Kg)	315					

TOOTH CHAMFERING	MODULE						표기외 일반 공차
	5	5-15	15				
HQ. T	C1	0.2	0.5	1.0			각도 : ±0.2°
	C2	1.0	1.5	2.0			6 - 30 : ±0.1
HC & HQ. I	C1	0.5	1.0	2.0			CHAMFER: C1.0
	C2	2.0	3.0	5.0			30 - 120 : ±0.15
							FILLET: R1.0
							120 - 315 : ±0.2
							마무리: ▽
							315 - 1000 : ±0.3
							1000 이상 : ±0.5

() 내의 치수는 다소 변경될 수 있음.

OUT LINE DWG									
No.	DESCRIPTION	SPECIFICATION		MAT'L	Q'TY	W/T	REMARK		
TITLE SPEC.	KDH GEARED MOTOR 7.5KW 4P IE3 I=1/40~1/80			CUSTOMER KD H2553 STANDARD TYPE					
	OUTLINE DIMENSION								
DRAWN	KSS	SCALE		1 / 1	UNIT	MM			
DESIGN	YH	DATE		2020.11.27	PROJECTION	④ ⑤			
CHECKED		REF. No.		KD H2553		REV. No.		△	
APPROVED		DRAWING No.		KDH2553-10-40-80-0D					
		(주) 케이 지 엠 KOREA GEARED MOTOR							

M5#0.8
M6# 1
M8#1.25
M10#1.5
M12#1.75
M16# 2
M18#2.5
M20#2.5
M22#2.5
M24#3