


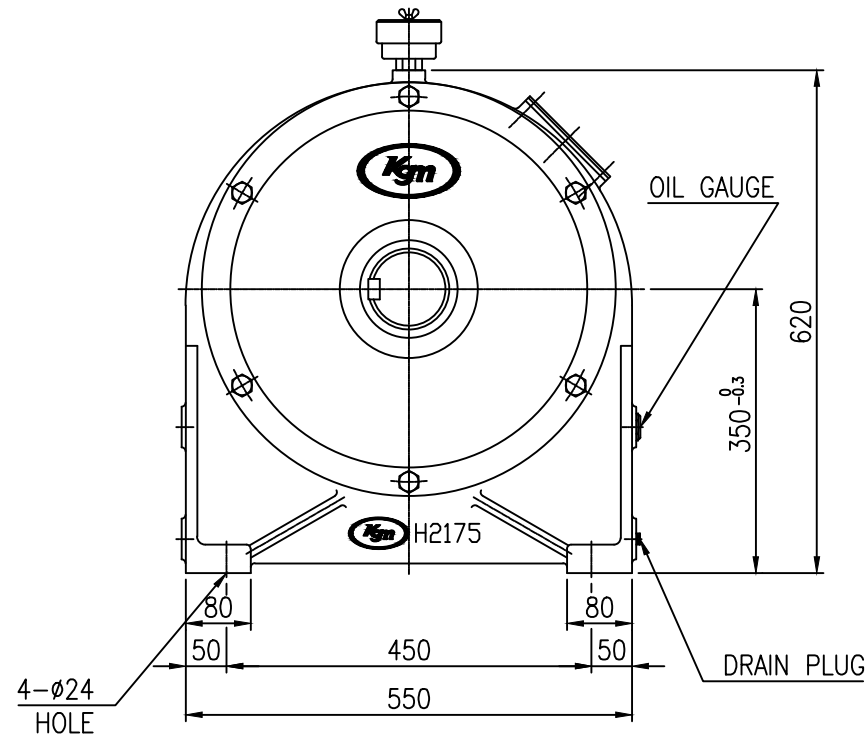


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

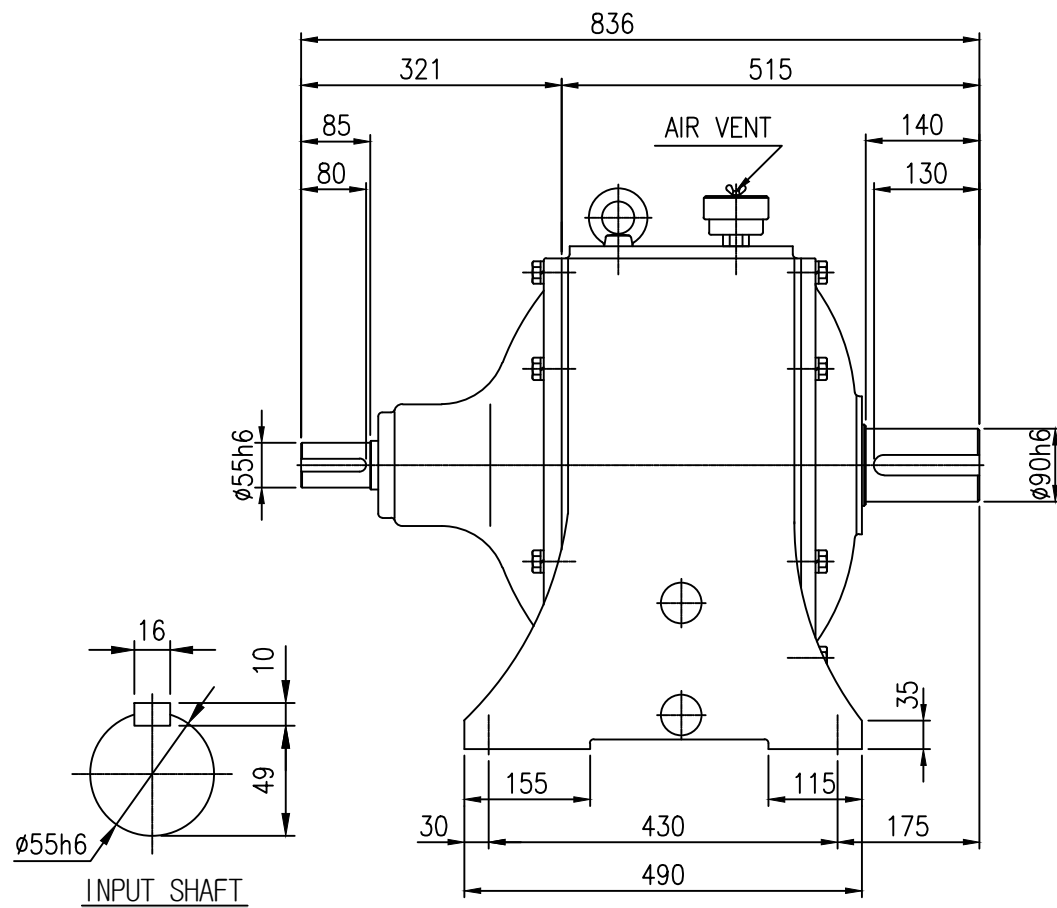

INPUT SHAFT

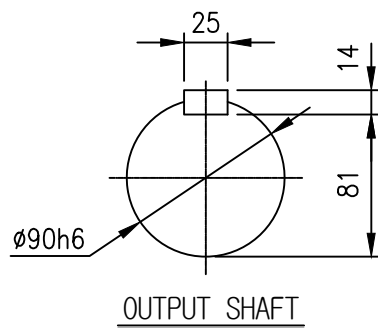

OUTPUT SHAFT

KD-HL H3502	CAPACITY(Kw)	30kw4P			19,22kw6P		
	REDUCTION RATIO	1/10	1/15	1/20	1/10	1/15	1/20
	OUTPUT R.P.M	180	120	90	120	80	60
	WEIGHT (Kg)	355					

TOOTH CHAMFERING		M O D U L E						표기와 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 - 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ±0.1
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ±0.1
HC & HQ. I	C1	0.5	1.0	2.0				마무라리 	315 - 1000 : ±0.1
	C2	2.0	3.0	5.0				M<8(R0.1-1M)	M=8-15(R0.3M)