




| NO. | REVISION | DATE | DESIGNED | CHECKED | APPROVED |
|-----|----------|------|----------|---------|----------|
| △   |          |      |          |         |          |
| △   |          |      |          |         |          |

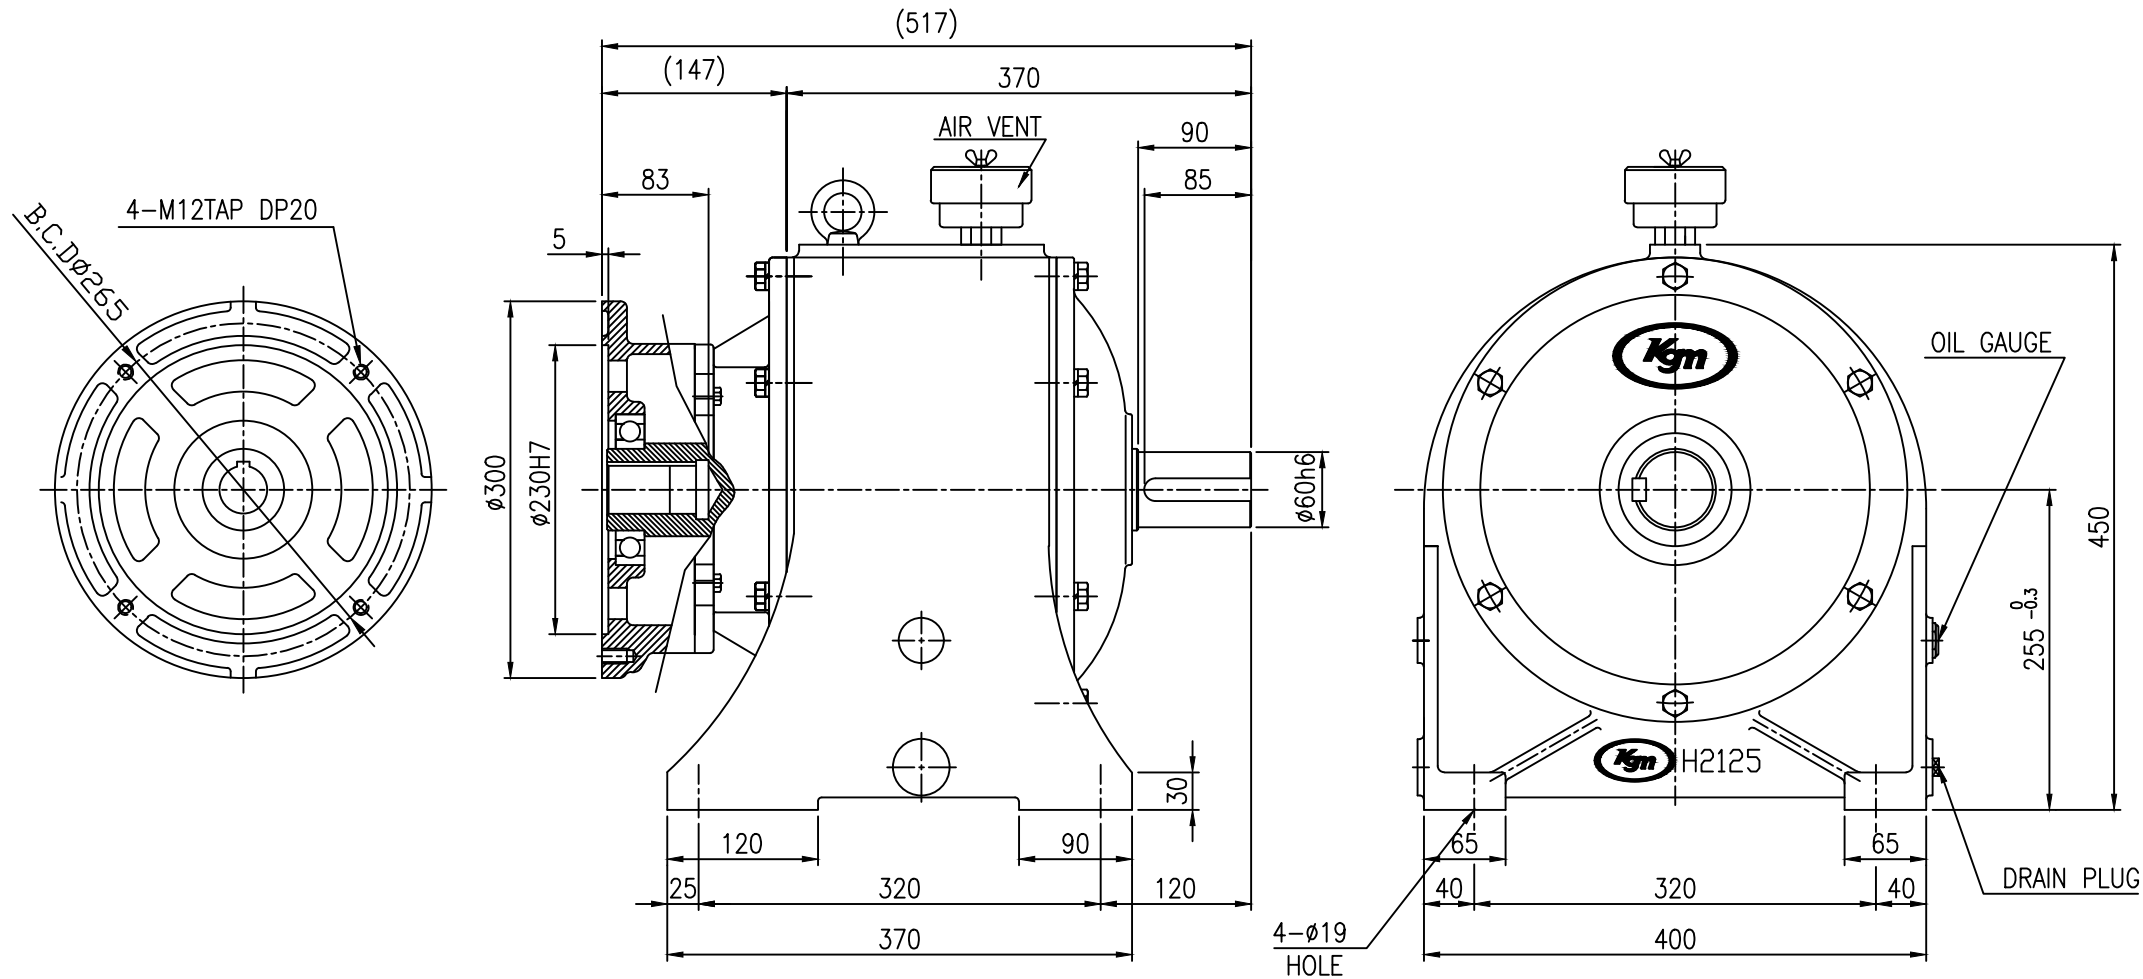

|          |
|----------|
| M5*0.8   |
| M6* 1    |
| M8*1.25  |
| M10*1.5  |
| M12*1.75 |
| M16* 2   |
| M18*2.5  |
| M20*2.5  |
| M22*2.5  |
| M24*3    |



INPUT KEY



OUTPUT SHAFT

|                      |                 |         |      |      |         |      |      |
|----------------------|-----------------|---------|------|------|---------|------|------|
| KD<br>H2552<br>I.E.C | CAPACITY(Kw)    | 7.5kw4P |      |      | 5.5kw6P |      |      |
|                      | REDUCTION RATIO | 1/10    | 1/20 | 1/30 | 1/10    | 1/20 | 1/30 |
|                      | OUTPUT R.P.M    | 180     | 90   | 60   | 120     | 60   | 40   |
|                      | WEIGHT (Kg)     | 145     |      |      |         |      |      |

| TOOTH CHAMFERING |    | M O D U L E |      |     |  |  |  | 표기와 일반 공차     |                   |             |
|------------------|----|-------------|------|-----|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------|-------------------|-------------|
|                  |    | 5           | 5-15 | 15  |                                                                                       |                                                                                       |                                                                                       | 각도 : ±0.2°    | 6 - 30 : ±0.1     |             |
| HQ. T            | C1 | 0.2         | 0.5  | 1.0 |  |  |  | CHAMFER: C1.0 | 30 - 120 : ±0.1   |             |
|                  | C2 | 1.0         | 1.5  | 2.0 |                                                                                       |                                                                                       |                                                                                       | FILLET: R1.0  | 120 - 315 : ±0.2  |             |
| HC & HQ. I       | C1 | 0.5         | 1.0  | 2.0 |                                                                                       |                                                                                       |                                                                                       | 마무리: ▽        | 315 - 1000 : ±0.3 |             |
|                  | C2 | 2.0         | 3.0  | 5.0 |                                                                                       |                                                                                       |                                                                                       | M<8(R0.1-1M)  | M=8-15(R0.3M)     | M>15(R0.3M) |

( ) 내의 치수는 다소 변경될수 있음.

|             |                                              |             |                         |            |                                                                                       |                                                                                       |        |
|-------------|----------------------------------------------|-------------|-------------------------|------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------|
|             | OUT LINE DWG                                 |             |                         |            |                                                                                       |                                                                                       |        |
| No.         | DESCRIPTION                                  |             | SPECIFICATION           | MAT'L      | Q'TY                                                                                  | W/T                                                                                   | REMARK |
| TITLE SPEC. | KDH GEARED MOTOR<br>IBC 7.5KW 4P I=1/10~1/30 |             |                         | CUSTOMER   | KD H2552                                                                              |                                                                                       |        |
|             | OUTLINE DIMENSION                            |             |                         | I.E.C TYPE |                                                                                       |                                                                                       |        |
| DRAWN       | KSS                                          | SCALE       | 1 / 1                   | UNIT       | mm                                                                                    |                                                                                       |        |
| DESIGN      | YHH                                          | DATE        | 2019.01.09              | PROJECTION |  |                                                                                       |        |
| CHECKED     |                                              | REF. No.    | KD H2552                |            | REV No.                                                                               |  |        |
| APPROVED    |                                              | DRAWING No. | KDH2552-IBC-10-10-30-00 |            |                                                                                       |                                                                                       |        |



(주) 케이 지 엠  
KOREA GEARED MOTOR