


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

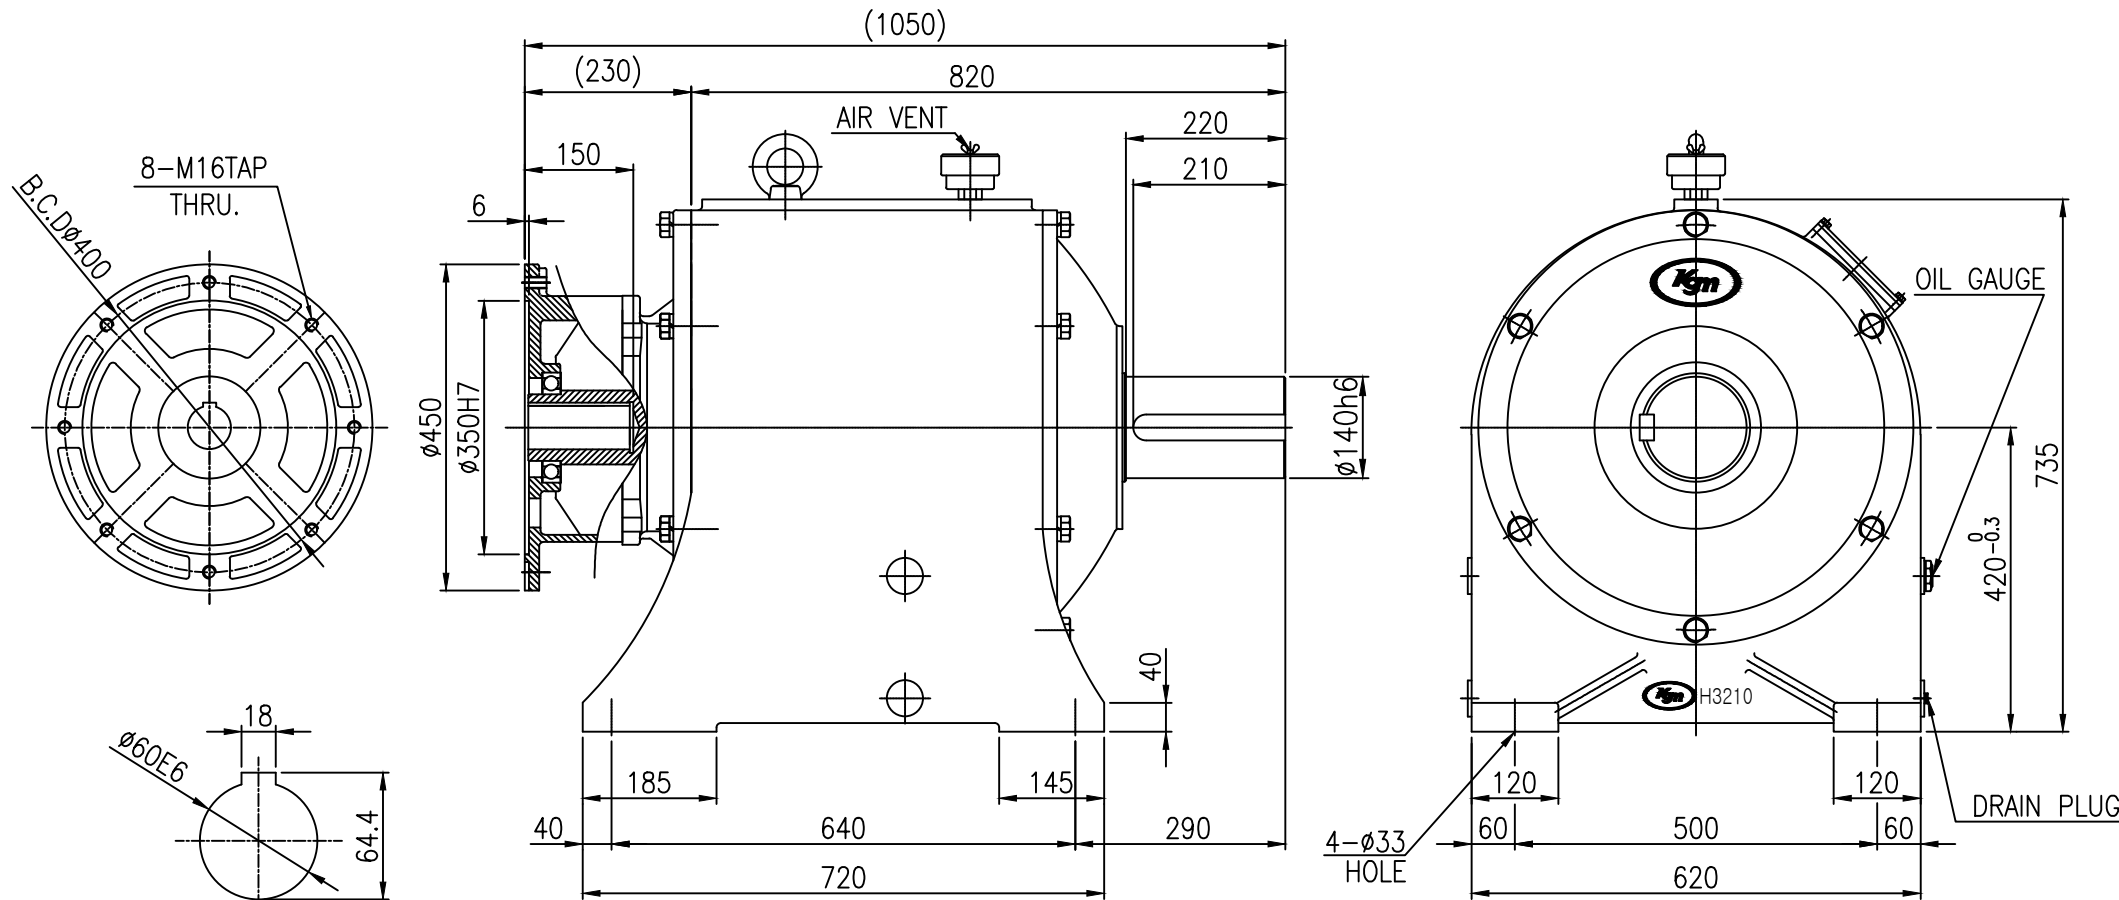

INPUT KEY

OUTPUT SHAFT

KD H4203 I.E.C	CAPACITY(Kw)	37kw4P			30kw6P		
	REDUCTION RATIO	1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M	45	36	30	30	24	20
	WEIGHT (Kg)	735					

TOOTH CHAMFERING		M O D U L E						표기와 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 ~ 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 ~ 120 : ±0.1
	C2	1.0	1.5	2.0				FILLET: R1.0	120 ~ 315 : ±0.1
HC & HQ. I	C1	0.5	1.0	2.0				마무리: ▽	315 ~ 1000 : ±0.1
	C2	2.0	3.0	5.0				M<8(R0.1~1M)	M=8~15(R0.3M)

()내의 치수는 다소 변경될수 있음.

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.		KDH GEARED MOTOR IEC 37KW 4P I=1/40~1/60 OUTLINE DIMENSION		CUSTOMER KD H4203 I.E.C TYPE			
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YHH	DATE	2020.10.06	PROJECTION	1		
CHECKED		REF. No.	KD H4203	REV.	No.		
APPROVED		DRAWING No.	KDH4203-IEC-50-40-60-0D				
		(주) 케이 지 엠 KOREA GEARED MOTOR					

M5±0.8
M6±1
M8±1.25
M10±1.5
M12±1.75
M16±2
M18±2.5
M20±2.5
M22±2.5
M24±3